
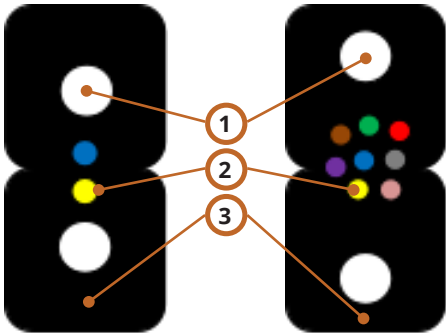


Drop Cable without IB Wire

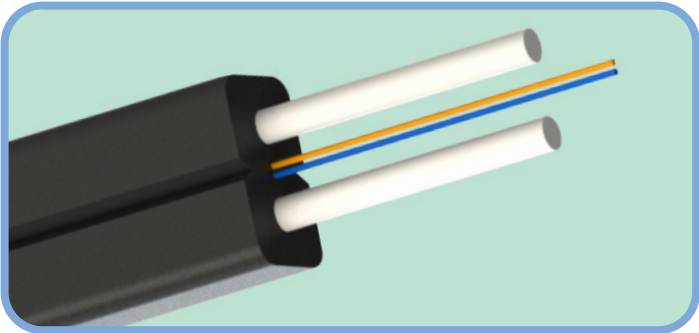

Technical Characteristics

- Low weight, easy to install and joint
- With excellent mechanical and environmental properties

Construction:

1. Strength member (**FRP**)
2. Optical fiber
3. Outer sheath (**LSZH, Black, UV proof**)

Dimension and Properties		GJXFH-1/2 G657A1		GJXFH-4/8 G657A1 (HFCDC)	
Physical	Fiber count (G657A1)	1	2	4	8
	Strength member	Nom.0.5mm*2			
	Outer sheath thickness	≥0.3mm			
	Cable OD	2.00.2mm×3.10.2mm		2.00.2mm × 3.10.2mm	2.50.2mm × 4.00.2mm
	Cable weight	103 kg/km			123 kg/km
	Operation temperature	-20 deg C to +70 deg C			
	Installation temperature	0 deg C to + 60 deg C			
	Transport and storage temperature	-20 deg C to + 70 deg C			
Mechanical	Max. tensile load	≥80N			
	Crush resistance	2200N/100mm			
	Min. bending radius	with supporting wire	120mm		
		without supporting wire	15mm		

STANDARD:
IEC 60793-1, IEC 60793-2, IEC 60794-2, ITU-T G.650,
ITU-T G.657

